

Extremely
High specification
Compact size
High performance

4-Inch Mobile Printer


LK-P400



KEY FEATURES



Convenient check for Paper status with Transparent cover

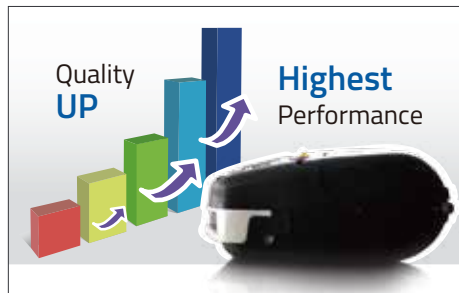

Highest performance with 127mm/s, 256MB, 8GB Flash Memory



Superior Portability with Compact & durable design

GENERAL FEATURES

- Run on any of popular operating systems such as Android, iOS and Windows.
- Compatible with ESC/POS, CPCL, ZPL
- Speedy communication made by USB, Wi-Fi(802.11 a/b/g/n), Bluetooth 4.2+BLE
- Apple MFi certified.
- Rapid graphic printing 127 mm/sec
- Sleek and slim design to enhance portability in various environments.
- A Variety of accessories optimized for re-charging and carry -such as Cigar jack, Battery Cradle, Belt Strap, Shoulder Strap.
- Fast charging and large battery capacity :
 - 7.4 V 2,500mAh
 - 3Hrs Charging time
 - 77Hrs Stand-by
- Adjustable media width from 1.9"(50mm) up to 4.4"(114mm) User-friendly paper width guide equipped
- Web-based management for basic functions.



LK-P400

4-Inch Mobile Printer

SPECIFICATIONS

PRINTER CHARACTERISTICS

Print Method

Direct thermal

Print Speed

Up to 5ips(127mm/sec)

Print width

Up to 4" (104mm)

Resolution

203 dpi (8dots/mm)

Memory

256MB RAM / 8GB Flash

Battery Voltage / Capacity

7.4 V / 2500mAh.

Rechargeable Li-ion battery 77 Hrs stand-by

Sensor

Paper end / Gap / Black mark / Over open

Reliability

TPH life : 50km

INTERFACE

Standard

USB

Optional

Wi-Fi(802.11 a/b/g/n)

Bluetooth Smart Ready Combo (BT 4.2+BLE)

PHISICAL CHARACTERISTICS

Dimension (W x D x H)

6.1" x 6.1" x 2.6" (155 x 157 x 67mm)

Weight (Kg)


1.75lb(794g, Including battery)

LCD (Color)

TFT 27.7 X 27.7 mm

2 Fonts support with 180dpi & 203dpi

* Only applies in case of ECS/POS

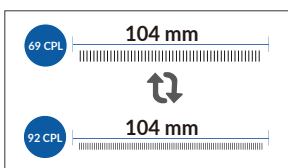

MEDIA CHARACTERISTICS

Media Type

Thermal paper/label

Media Width

1.96"~ 4.49"(50~114mm)

Media Core Diameter

Ø 0.4" (12.5mm ± 0.5mm)

Media Roll Diameter

Ø 2.2"(57mm)

Thickness

0.06~0.16mm

OPERATING CHARACTERISTICS

Operating Temperature

-5.8 ~ 131°F(-21 ~ 55°C)

Operating Humidity

10 ~ 90%

Storage Temperature

-22 ~ 149°F(-30 ~ 65°C)

Storage Humidity

10 ~ 90%

Dust-and Water-resistance Rating

IP54 certified

Drop Rating

6.5ft.(2m, Set only) to concrete

AGENCY APPROVALS

KCC, CE, FCC, UL/cUL,MFI,BCS

ACCESSORIES

Standard

AC Cord, Adaptor, USB Cradle, Serial Cable

Battery pack, Thermal roll paper, Belt strap

Option

Shoulder strap, Cigar jack, Battery Cradle

SOFTWARE

Emulation

ECS/POS, CPCL, ZPL/EPL Command compatible

Driver

Windows Driver(10, 2012, 8, 7, 2008, VISTA, 2003, XP, 32bit & 64bit), Window CE & Mobile Driver & SDK (CE 4.2~, Mobile 5.0~), Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver

SDK

iOS, Android(2.1~), Windows, Linux

BARCODE

1D

EAN-8, EAN-8(+2+5), EAN-13, EAN-13(+2+5) Codabar, Code11, Code39, Code93, Code128, ITF, LUPC-A(+2+5), UPC-E, UPC-E(+2+5) Planet, UPC-A etc

2D

QR, PDF417, MicroPDF417, Maxicode, Datamatrix, Aztec, RSS14, TLC39

FONT / GRAPHICS

Character size

Asian Font(KOR, JPN, CHN_GB2312, CHN_BIG5) Font0/1/2/4/5/6/7, Resident TTF, Downloadable Down loadable TTF, FontA~H, FontGS Resident TTF(Font0), Font1~8

Characters per line (CPL)

Font A(12x24): 69cpl

Font B(9x17): 92cpl

* Only applies in case of ECS/POS

Character set

95 Alphanumeric,

14 International,

128 x 18 Graphic

* Only applies in case of ECS/POS



BARCODE



EASY LOAD



COMPACT DESIGN



50~114mm

PAPER WIDTH

sewoo

Republic of Korea [Head Office/R&D Center]

28-6, Gajangsaneopdong-ro, Osan-si, Gyeonggi-do, 18103, Republic of Korea

T. +82-31-8077-5000 / F. +82-31-624-5310
E. sales@miniprnter.com

North America

20280 S. Vermont Ave. STE 200,
Torrance, CA 90502, USA

T. +1-310-561-8030
E. sales@miniprnter.com

China Office

T. +86-139-1116-9916
E. sales@miniprnter.com

Europe(Germany) Office

Ludwig-Erhard Strasse 30-34,
65760 Eschborn, Germany

T. +49-0-6196-887-3766-7
F. +49-0-6196-887-3768
E. sales@miniprnter.com

México

Paseo de la Reforma No. 265 Piso 2.
Oficina SBC. Col. Cuauhtémoc,
C.P. 06500 Ciudad de Mexico

T. +52-1-55-3232-9543
E. sales@miniprnter.com



